



ISO 9002  
059-A


**VANGUARD**  
**VANGUARD**  
INNOVATION & DEDICATION



## ELECTRIC BOLT

### SPECIFICATIONS AND TECHNICAL DETAILS:

- DIMENSIONS : BODY : 200mmL x 34mmW x 42mmD  
COVER PLATE : 210mmL x 42mmW x 0.8mmD  
FACE PLATE : 200mmL x 34mmW x 3mmD  
STRIKE PLATE : 90mmL x 24mmW x 2.7mmD  
(ML230SLD SERIES / BODY : 230l x 38W x 42D  
STRIKE PLATE : 115L x 30W x 3mmD)
- CURRENT DRAW : 0.9A / 12VDC ( PULL-IN CURRENT )
- HOLDING CURRENT : 0.3A / 12VDC
- VOLTAGE : 12VDC OR 24VDC
- ML200SLD : WITH LOCK AND DOOR STATUS SENSOR
- OPTIONS : SL / LOCK STATUS SENSOR
- SD / DOOR STATUS SENSOR
- FAIL-SAFE : LOCKED WHEN ENERGIZED
- AUTO-RELOCK JUMPER
- BUILT-IN VOLTAGE SPIKE SUPPRESSOR
- WEIGHT : 0.9KGS.
- CE APPROVED
- MOUNTING BRACKETS : UG200, UG201, UG202,U-200

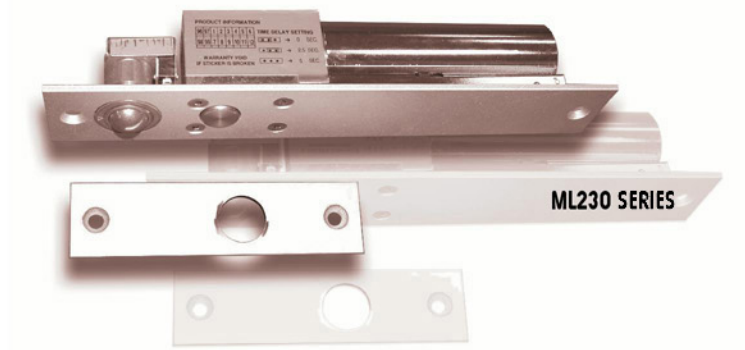

VGSE RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

